


Power Type Fixed Wirewound Resistors
Type - REH Series

△ Features


- High resistivity to heat, small resistance temp coefficient
- Change in resistance with temp is linear
- Resistance value unchanged after long use
- Good resistivity until short time overload
- Insulation: ≥ 500V, 20MΩ
- Load: 1000V 1 Min.

△ Application

- High Power
- Power Supplies
- Telecom Equipment

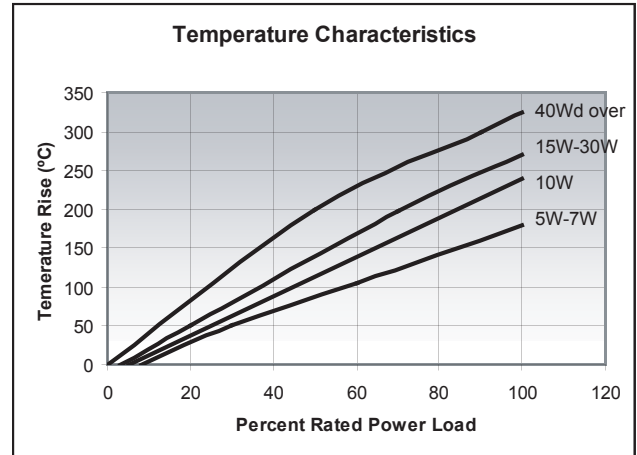

Fixed Component Resistors

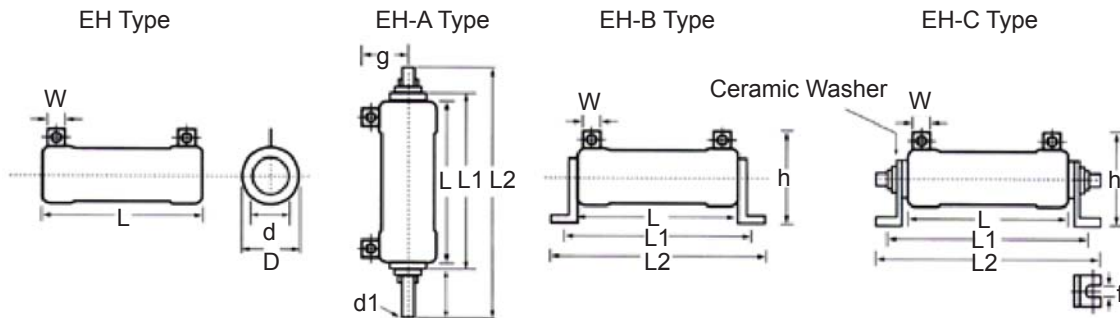

△ Specifications

Silicone Coating Type	Resist Range: Adjustable Type	Dimension (mm)										A Type		B Type		C Type			Special Type With Ceramic Coating
		L	D	d	g	W	d1	f	L1	L2	L1	L2	h	L1	L2	h			
EH 5W	0.1Ω ~ 5K(650)	30	12	6	17	5			40	52	45								
EH 10W	0.1Ω ~ 10K(1.2K)	45	12	6	17	5			55	67	60								
EH 15W	0.1Ω ~ 15K(1.5K)	45	15	8	19	5		4.1	55	67	60								
EH 20W	0.1Ω ~ 20K(2.2K)	50	19	10	20	5		4.1	60	77	68	76	38	76	86	38			
EH 30W	0.1Ω ~ 30K(3.3K)	75	19	10	20	5		4.1	85	105	93	101	38	101	111	38			
EH 40W	0.1Ω ~ 40K(4.9K)	90	19	10	20	5		4.1	100	115	108	116	38	116	126	38			
EH 50W	0.1Ω ~ 50K(5.6K)	75	30	16	32	8	5	5.2	89	110	100	117	58	115	131	58	CHT	75W	
EH 60W	0.1Ω ~ 60K(7K)	90	30	16	32	8	5	5.2	104	120	115	132	58	130	146	58	CHT	90W	
EH 80W	0.1Ω ~ 80K(10K)	115	30	16	32	8	5	5.2	129	150	140	157	58	155	171	58	CHT	120W	
EH 100W	0.1Ω~100K(12K)	140	30	16	32	8	5	5.2	154	173	165	182	58	180	196	58	CHT	150W	
EH 120W	0.1Ω~120K(15K)	163	30	16	32	8	5	5.2	179	200	188	207	58	203	221	58	CHT	180W	
EH 150W	0.1Ω~150K(16K)	195	30	16	32	8	5	5.2	209	230	220	237	58	235	251	58	CHT	225W	
EH 200W	0.1Ω~200K(24K)	254	30	16	32	8	5	5.2	268	288	279	296	58	294	310	58	CHT	300W	
EH 250W	0.1Ω~250K(30K)	303	30	16	32	8	5	5.2	319	340	328	347	58	343	361	58	CHT	375W	
EH 300W	0.1Ω~300K(50K)	254	45	28	47	15		9.15	270			294	314	90	309	330	90	CHT	450W
EH 400W	0.1Ω~400K(60K)	330	45	28	47	15		9.15	345			379	390	90	385	406	90	CHT	600W
EH 500W	0.1Ω~500K(80K)	303	55	35	52	15		9.15	318			343	363	95	358	378	95	CHT	750W
EH 600W	0.1Ω~600K(90K)	330	55	35	52	15		9.15						385	405	95	CHT	850W	
EH 750W	0.1Ω~750K(100K)	390	55	35	52	15		9.15						445	465	95	CHT	1000W	
EH 1000W	0.1Ω~ 1M(120K)	500	55	35	52	15		9.15						555	575	95	CHT	1500W	
EH 1500W	0.1Ω~ 1.5M(150K)	500	69	40	60	15		9.15						584	608	130	CHT	2250W	
EH 2000W	0.1Ω~ 2M(200K)	650	69	40	60	15		9.15						734	758	130	CHT	3000W	